

自吸循环水泵 SELF-CIRCULATION PUMP



■ **HZS-750**



超静音



性能优



耐腐蚀

SUITABLE FOR FRESH & SALT WATER CIRCULATION, SAND FILTER



■ **HZS-200**



■ **HZS-250**



■ **HZS-300**



■ **HZS-280**



■ **HZS-370**



■ **HZS-550**

型号 (Model)	额定电压 (Voltage)	额定频率 (Frequency)	额定功率 (Power)	最大扬程 (H-Max)	最大流量 (Output)	重量 (Weight)	外形尺寸 (Dimensions)
HZS-200	220V	50Hz	200W	5.5m	5m ³ /h	5.0kg	455x133x245mm
HZS-250	220V	50Hz	250W	6.5m	7m ³ /h	5.5kg	455x133x225mm
HZS-280	220V	50Hz	220W	8m	8m ³ /h	5.5kg	360x170x200mm
HZS-300	220V	50Hz	300W	7m	9m ³ /h	5.5kg	455x133x245mm
HZS-370	220V	50Hz	370W	11m	10m ³ /h	9kg	485x185x280mm
HZS-550	220V/380V	50Hz	550W	10m	13m ³ /h	9kg	494x165x259mm
HZS-750	220V/380V	50Hz	750W	11m	14.5m ³ /h	9.5kg	494x165x259mm



ALL INDIA DISTRIBUTORS
AQUASSTAR
 NO:5, WEST MADA STREET, KOLATHUR, CHENNAI-600099.

自吸循环水泵

SELF-CIRCULATION PUMP



超静音



性能好



连接佳

SUITABLE FOR FRESH & SALT WATER CIRCULATION, SAND FILTER



■ HLB-100




■ HLB-150



■ HLB-200



■ HLB-300

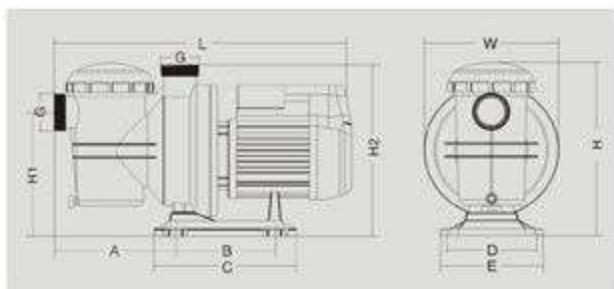

型号 Model	额定电源 Voltage	额定功率 Power KW HP	流量 Qmax (L/min)	扬程 Hmax (m)	重量 Weight (kg)	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H1 (mm)	H2 (mm)	G (mm)	配用管径 Tube Diameter
HLB-100	220V/50Hz	0.75 1.0	285	8	12.2	559	240	315	228	190	271	160	185	218	310	32 $\frac{1}{2}$	φ50/φ48.5mm
HLB-150	220V/50Hz	1.1 1.5	360	10	14.8	559	240	315	228	190	271	160	185	218	310	32 $\frac{1}{2}$	φ50/φ48.5mm
HLB-200	220V/50Hz	1.5 2.0	400	12	14.8	559	240	315	228	190	271	160	185	218	310	32 $\frac{1}{2}$	φ50/φ48.5mm
HLB-300	220V/50Hz	2.2 3.0	430	14	15.8	565	240	315	228	190	271	160	185	218	310	32 $\frac{1}{2}$	φ50/φ48.5mm

自吸循环水泵

SELF-CIRCULATION PUMP



■ HL-150~HL-400



超静音



性能好



绝缘性

SUITABLE FOR FRESH & SALT WATER CIRCULATION, SAND FILTER




■ HL-150



■ HL-200



■ HL-300

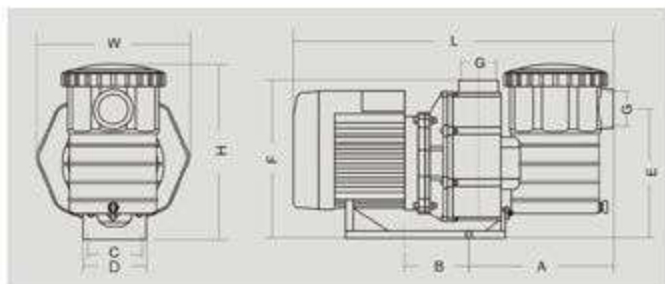

■ HL-350

型号 Model	额定电压 Voltage	额定功率 Power KW HP	流量 Qmax (L/min)	扬程 Hmax (m)	重量 Weight (kg)	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	配用管径 Tubo Diameter
HL-150	220V/380V/50Hz	1.1 1.5	460	17	18.4/18.2	610	275	335	287	148	95	118	252	301	G2	φ63/φ60mm
HL-200	220V/380V/50Hz	1.5 2.0	530	16	19.6/17.9	610	275	335	287	148	95	118	252	301	G2	φ63/φ60mm
HL-300	220V/380V/50Hz	2.2 3.0	585	18	21.7/19.5	610	275	335	287	148	95	118	252	301	G2	φ63/φ60mm
HL-350	220V/380V/50Hz	2.6 3.5	650	20	23.1/21.7	620	275	335	287	148	95	118	252	301	G2	φ63/φ60mm
HL-400	220V/380V/50Hz	3.0 4.0	680	21	21.5	630	275	335	287	148	95	118	252	301	G2	φ63/φ60mm